

🌡️ -50°C ... +300°C ^ +700°C Ruban/ Tape  
 🌡️ -50°C ... +300°C Ruban adhésif / Wrapping Tape



# FLEXAhightemp

**Ruban FLEXAhightemp**  
 Ruban à lisière solide

**Material**  
 revêtement ininflammable  
 aramide ou silicate de calcium

**FLEXAhightemp Tape**  
 Tape with tightly woven selvages

**Material**  
 fireblocker coating  
 aramid or calcium-silikate



| N° FLEXA             | largeur<br>width | épaisseur<br>thickness |  kg/m |  m |
|----------------------|------------------|------------------------|--|---|
| <b>rouge<br/>red</b> |                  |                        |  |   |
| 2061.899.025         | <b>25</b>        | 2 - 3 mm               | 0,040  | 10  |
| 2061.899.050         | <b>50</b>        | 2 - 3 mm               | 0,084  | 10  |
| 2061.899.075         | <b>75</b>        | 2 - 3 mm               | 0,122  | 10  |
| 2061.899.100         | <b>100</b>       | 2 - 3 mm               | 0,165  | 10  |


**Ruban adhésif FLEXAhightemp**  
 pour la fixation de tuyaux  
 ignifuges

**Material**  
 silicate de calcium avec revêtement  
 rouge en silicone

**FLEXAhightemp Wrapping Tape**  
 for fastening of  
 fire protection conduits

**Material**  
 calcium-silicate with  
 red silicone coating

| N° FLEXA             | largeur<br>width |  kg/m |  m |
|----------------------|------------------|--|---|
| <b>rouge<br/>red</b> |                  |  |   |
| 2061.898.025         | <b>25</b>        | 0,020  | 9   |

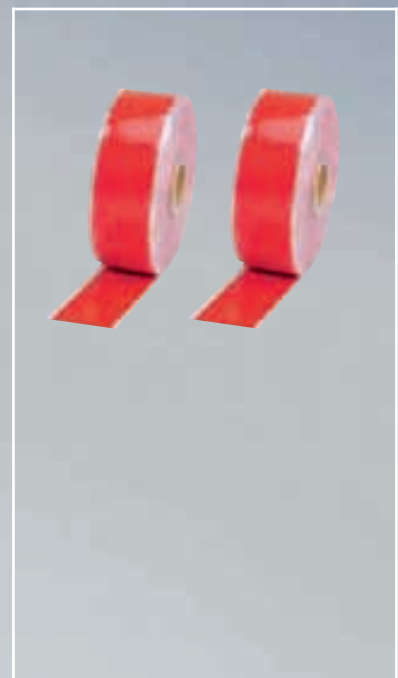

Portrait

Gaines annelées  
ROHRflex

Raccords  
FLEXAquick

Tuyaux  
métalliques

Tuyaux  
métalliques  
étanches aux liquides

Tuyaux  
synthétiques

Tuyaux  
spéciaux