



Raccord droit rapide, synthétique
filetage extérieur en laiton nickelé
décharge de traction
et support de blindage
haute étanchéité


- résistant à l'huile et l'essence
- largement résistant aux acides et solvants
- sans silicone, cadmium et halogène
- résistance élevée aux contraintes mécaniques
- résistant aux impacts
- couple élevé du raccord fileté
- serrage et étanchéité optimaux des câbles

Pour assurer un indice de protection élevé entre le presse-étoupe et le corps du raccord, il est nécessaire d'utiliser une masse d'étanchéité (voir norme 1015 de la société FLEXA).

Plastic connector, quick-type
straight
outer thread made of nickel-plated brass
strain relief and shielding
high sealing rate

- resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- fit for high mechanical stress
- impact-resistant
- high torque of thread connection
- optimal held and sealing of cables at the same time

To ensure a high protection system, IP 68, at the thread between cable gland insert and screw connector housing it is necessary to use a sealing compound (FLEXA company standard 1015 A).

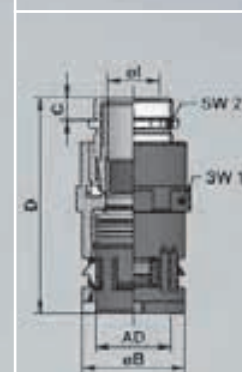

Portait

Gaines annelées
ROHRflex

Raccords
FLEXAquick

N° FLEXA	N° FLEXA		DE OD										
noir black	gris * grey *	mm	ø	ø I	ø B	C	D	SW1	SW2	kg/100	Pce Pcs.		
RQGKZE-M				métr. EN 60423				[IP 68 / 69K]					
5111.010.212	5111.010.012	3,0- 6,0	10,0	M 12	6,5	20,0	5,0	53,5	18	14	1,800	50	
5111.013.216	5111.013.016	5,5- 8,5	13,0	M 16	10,0	24,0	5,0	55,0	22	17	3,440	50	
5111.015.220	5111.015.020	7,5-12,0	15,8	M 20	13,5	27,0	6,0	63,0	25	22	3,500	50	
5111.021.220	5111.021.020	9,5-12,0	21,2	M 20	13,5	29,5	6,0	65,0	28	22	5,600	25	
5111.021.225	5111.021.025	9,5-16,0	21,2	M 25	16,5	33,0	7,0	70,0	31	27	6,100	25	
5111.028.225	5111.028.025	9,5-16,0	28,5	M 25	16,5	37,0	7,0	70,0	31	27	6,880	25	
5111.034.232	5111.034.032	14,5-20,5	34,5	M 32	22,0	44,0	8,0	75,0	42	34	13,400	25	
5111.042.240	5111.042.040	20,0-26,5	42,5	M 40	28,0	58,0	8,0	107,0	55	43	19,600	10	
5111.054.250	5111.054.050	25,0-34,0	54,5	M 50	36,0	68,0	9,0	120,0	65	55	27,500	10	
RQGKZE-P				PG DIN 40430				[IP 68 / 69K]					
5511.010.207		3,0- 6,0	10,0	7	6,8	20,5	5,0	50,0	18	14	1,860	50	
5511.013.209		4,0- 7,5	13,0	9	8,5	24,0	6,0	56,5	22	17	2,800	50	
5511.015.211		4,0- 9,5	15,8	11	10,5	27,0	6,0	57,0	25	20	3,500	50	
5511.021.216		9,0-13,0	21,2	16	14,8	33,0	6,5	65,0	31	24	4,900	25	
5511.028.221		11,5-17,0	28,5	21	18,5	41,5	7,0	71,0	39	30	8,500	25	
5511.034.229		19,0-23,0	34,5	29	25,5	48,5	8,0	75,0	46	40	13,400	25	
5511.042.236		25,0-33,0	42,5	36	34,5	58,0	9,0	103,0	55	50	17,800	10	
5511.054.248		35,0-43,0	54,5	48	44,0	68,0	10,0	120,0	65	64	28,400	10	

* gris - Délai de livraison sur demande
* grey - Delivery time on request