


# LED drivers \_ A13

C.C.E.A. s.r.l.  
Via Vicenza, 80 Altavilla (VI) - Italy  
Phone ++39 0444 572083 Fax ++39 0444 572337  
[www.ccealights.com](http://www.ccealights.com) - [ccea@ccealights.com](mailto:ccea@ccealights.com)



Direct current electronic drivers for power LED

## cod. A13 350 TC




Wiring diagram

### TECHNICAL FEATURES

Input voltage	100-240 V ac
Frequency	50/60 Hz
Output voltage	12 V dc
Output current	350 mA cost
Power	4 W
IEC class	II
Size (LxbxH)	60x35x21 mm
Degree of protection	IP20
N.LED	3

## cod. A13 500 TC




Wiring diagram

### TECHNICAL FEATURES

Input voltage	100-240 V ac
Frequency	50/60 Hz
Output voltage	12 V dc
Output current	500 mA cost
Power	6 W
IEC class	II
Size (LxbxH)	42x40x22 mm
Degree of protection	IP20
N.LED	3

## cod. A13 700 TC

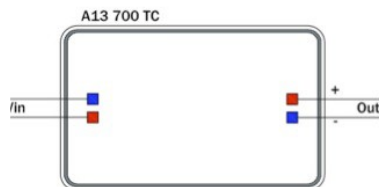

Wiring diagram

### TECHNICAL FEATURES

Input voltage	100-240 V ac
Frequency	50/60 Hz
Output voltage	17 V dc
Output current	700 mA cost
Power	12 W
IEC class	II
Size (LxbxH)	115x34x19 mm
Degree of protection	IP20
N.LED	3

All the information gathered by this manual can be modified at any time without prior notice and do not imply any obligation by CCEA.