

LED drivers _ AS112

C.C.E.A. s.r.l.
Via Vicenza, 80 Altavilla (VI) - Italy
Phone ++39 0444 572083 Fax ++39 0444 572337
www.ccealights.com - ccea@ccealights.com




Dimmable direct current electronic drivers for power LED


cod. AS112 350 TC DIM



Optional cod.DIMMER

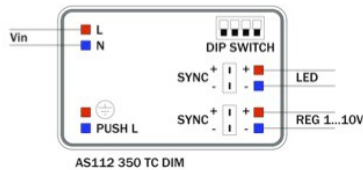

Wiring diagram




TECHNICAL FEATURES

Input voltage	110-240 V ac
Frequency	50/60 Hz
Output voltage	24+48 V dc
Output current	350 mA cost
Power	17 W
IEC class	II
Size (LxbxH)	237x30x21 mm
Degree of protection	IP20
N.LED	12

cod. AS112 500 TC DIM



Optional cod.DIMMER

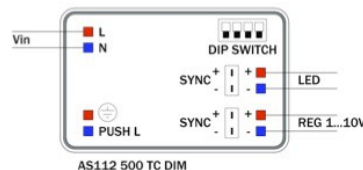

Wiring diagram




TECHNICAL FEATURES

Input voltage	110-240 V ac
Frequency	50/60 Hz
Output voltage	24+48 V dc
Output current	500 mA cost
Power	24 W
IEC class	II
Size (LxbxH)	237x30x21 mm
Degree of protection	IP20
N.LED	12 (8 @ 110V)

cod. AS112 700 TC DIM



Optional cod.DIMMER

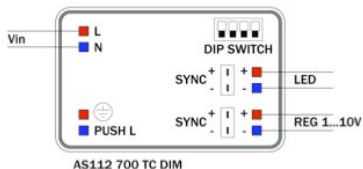

Wiring diagram



TECHNICAL FEATURES

Input voltage	110-240 V ac
Frequency	50/60 Hz
Output voltage	24+48 V dc
Output current	700 mA cost
Power	32 W
IEC class	II
Size (LxbxH)	237x30x21 mm
Degree of protection	IP20
N.LED	12 (6 @ 110V)

All the information gathered by this manual can be modified at any time without prior notice and do not imply any obligation by CCEA.